

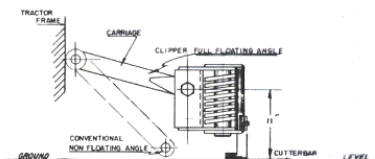
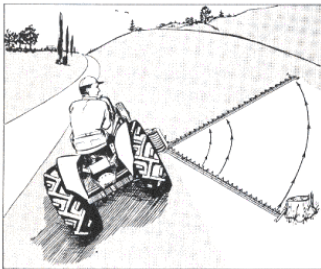


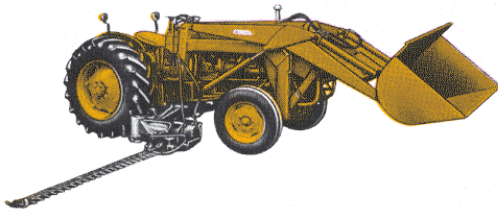

HYDRO-CLIPPER MOWER

For use with Oliver Tractors

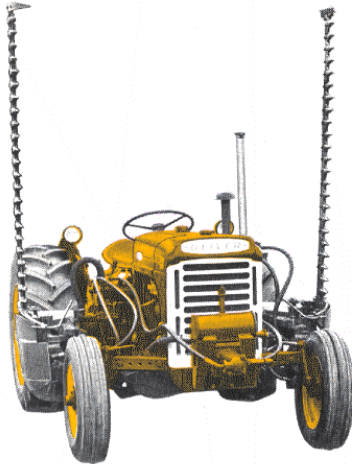

- Low maintenance cost.
- Smooth hydraulic drive.
- Close-in mounting—(necessary for ditch and bank mowing).
- Light weight—approximately 500 pounds.
- Automatic 90° self-returning breakaway.
- High speed cutting.
- Available R. H., L. H., or Twin mounting.

- Loader-mower combinations are now practical.
- The Hydro-Clipper is engineered to function with the loader hydraulic system, and the self-returning cutterbar is a necessary requirement in any satisfactory loader-mower combination.
- A versatile package through the use of a selector valve in the hydraulic system.
- The mower can be quickly and easily removed.

- Only Hydro-Clipper has the 90° self-returning breakaway feature, which makes it unnecessary for the operator to leave the tractor seat to reposition the cutterbar after striking an object. It is trouble free and requires no maintenance. When mowing brush, vetch, etc., the tractor clutch is not slipped as is necessary with a spring-loaded latch-type breakaway.

- An important factor in the low maintenance cost of the Hydro-Clipper is the "full floating angle" of the carriage, which supports the cutterbar on the tractor. The Clipper design prevents costly repairs by permitting the inner shoe to pass over rocks and stumps . . . even when they strike inside the breakaway.

Ind. Manual DIRECT PURCHASE Section
DP-8 Page 6A

Printed in U.S.A.—4-63

Form 627-R